

SPECIFICATIONS

725DT⁶

Engine	Kubota, three cylinder, 4 cycle, liquid cooled
Model No.	D902 - E
Horsepower (G.I.H.P.)*	24.8 (18.5 kw)
Displacement	54.8 cu. in. (898 cc)
No-load r.p.m.	3600
Charging System	12VDC 40 amp. negative ground
Starter	Electric
Electrical System	Safety interlocked

* Engine Manufacturer's Gross Hp Rating

PTO	3100 r.p.m. (max) Electric clutch
------------	--------------------------------------

Drive System	T ⁶ hydrostatic transmission direct drive
---------------------	--

Steering	Dual levers independently control speed and direction of travel. Zero turning radius (center of machine is pivot point)
-----------------	--

Speed	
Forward (variable)	0 to 10 mph (16.1 km/h)
Reverse (variable)	0 to 6 mph (9.6 km/h)

Fuel Tank Capacity	8 U.S. gal. (30.2 l)
---------------------------	----------------------

Tire Sizes

Front Drive Wheels	
Standard	22 x 11 x 10 - 4 ply rated
Optional	22 x 11 x 10 - 4 ply rated
Tail Wheel	13 x 6.50 x 6 rib - 4 ply rated

Dimensions of Tractor

Seat Back Height	47" (1.20 m)
Seat Cushion Height	30.5" (.78 m)
Tractor Width	51.5" (1.31 m)
Tractor Length	80" (2.11 m)
Wheel Base	51.5" (1.31 m)

Weight - Uncrated	1000 lbs (454 kg)
Weight - Crated	1210 lbs (549 kg)

Hour Meter	Standard
------------	----------

SAFETY SYMBOLS



This Safety Alert Symbol means **ATTENTION! BECOME ALERT! YOUR SAFETY IS INVOLVED!**

Throughout this manual the term **IMPORTANT** is used to indicate that failure to observe can cause damage to equipment. The terms **CAUTION**, **WARNING** and **DANGER** are used in conjunction with the Safety Alert Symbol [a triangle with an exclamation mark] to indicate the degree of hazard for items of personal safety.

CAUTION

Is used for general reminders of good safety practices or to direct attention to unsafe practices.

WARNING

Denotes a specific potential hazard.

DANGER

Denotes the most serious specific potential hazard.

SAFETY DECALS

Replace Immediately If Damaged

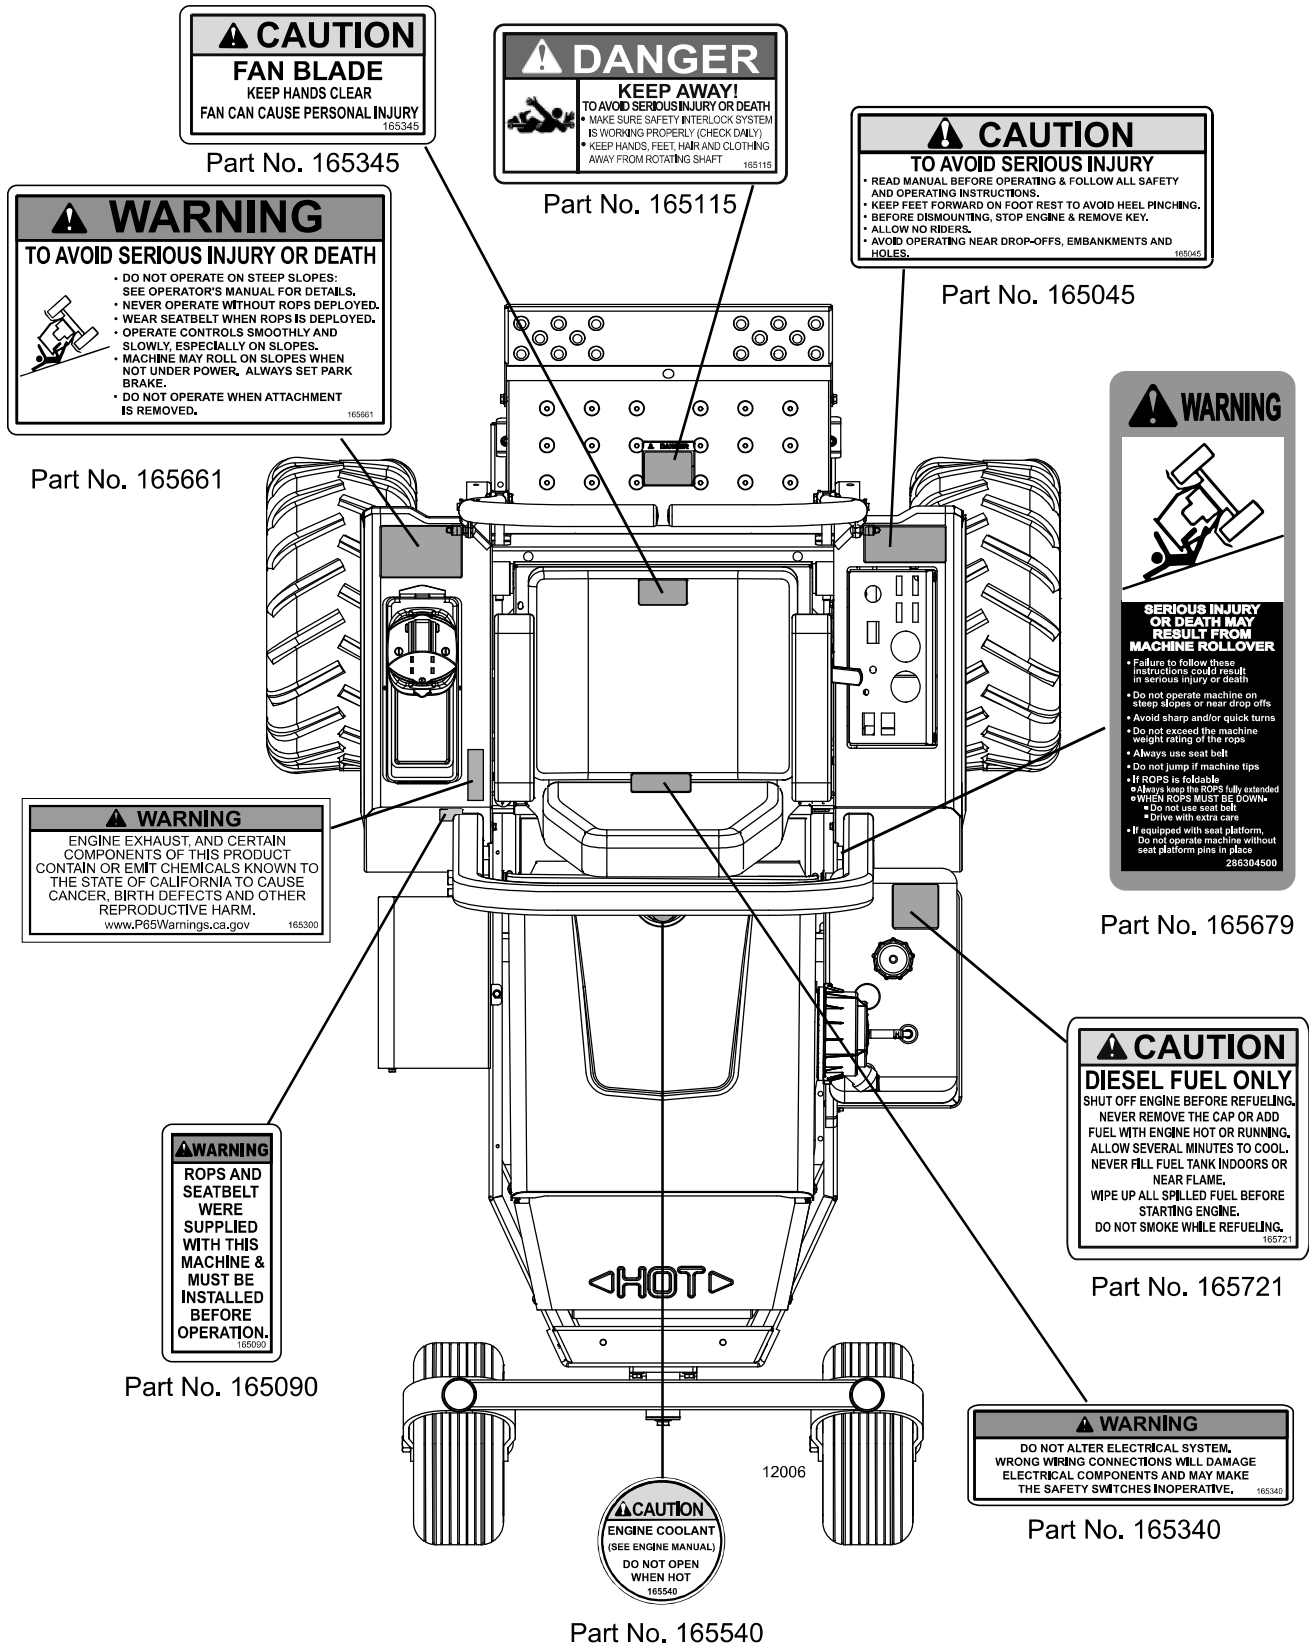


Fig. 1